

CONTINUING (1.53(b)) UTILITY PATENT APPLICATION TRANSMITTAL

(Only for continuing applications under 37 CFR 1.53(b))

Attorney Docket No.: 826.1535CIP/JDH

First Named Inventor: Hironori KANNO, et al.

Title: REMOTE SLIDE SHOW SYSTEM USING A BROWSER

Express Mail Label No.

J 4675 U.S. PTO
109/477452

01/04/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 56]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 26]
4. ☒ Oath or Declaration [Total Pages: 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (see Box 18)
5. ☐ This application is filed by fewer than all the inventors named in the prior nonprovisional application.
 - a. ☐ **DELETE** the following inventor(s) named in the prior nonprovisional application:
 - b. ☐ The inventor(s) to be deleted are set forth on a separate sheet attached hereto.
6. ☒ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
7. ☐ Microfiche Computer Program (Appendix)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☒ Foreign priority benefit under 35 U.S.C. §119 is claimed.
 - a. ☐ Certified Copy of Priority Document(s) filed in prior application No. 1
 - b. ☒ Certified Copy of Priority Document(s) enclosed.
 - c. ☐ Certified Copy of Priority Document(s) to follow.
13. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
14. ☐ Preliminary Amendment
 - a. ☐ enclosed herewith.
 - b. ☐ incorporated herein (see Box 18).
15. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
16. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
17. ☐ Other:

01/04/00

00177452.030400

09477452.010400

APPLICATION FOR
UNITED STATES LETTERS PATENT
SPECIFICATION

Inventor(s): Hironori KANNO, Yoshiyuki HIRASHIMA,
and Mikio FURUYAMA

Title of the Invention: REMOTE SLIDE SHOW SYSTEM USING A
BROWSER

Remote Slide Show System Using a Browser

Cross Reference to Related Application

5 The application is a continuation-in-part application of U.S. Patent Application Serial No. 09/244,043 filed on February 4, 1999, which is incorporated by reference in this application.

Background of the Invention

10 Field of the Invention

The present invention relates to a slide show system for performing a remote slide show by using the screen information obtained by a browser in one or more browser systems referring to an information
15 network such as a WWW (World Wide Web) which is currently a main source of information on the Internet.

Description of the Related Art

20 The Internet is realized by connecting a plurality of computers via a communication network. A world-wide information network which is realized by the Internet is named a WWW system. Recently, as an amount of information transmission increases over the WWW
25 system, various kinds of multi-media information have

been provided on the Internet.

5 A page of the WWW (a web page) is a unit of the multi-media information to be provided on the WWW, and is composed of an HTML (HyperText Markup Language) document and related data which are stored in an arbitrary WWW server. The WWW server transmits this web page to a browser provided on a WWW client according to an HTTP (HyperText Transfer Protocol). The WWW browser displays the thus-received web page
10 on a screen of the WWW client.

The web page generally can provide text information composed of character data, image information composed of graphic data, audio information, animation information or the like to a
15 user by using the HTML. Therefore, here, the display of a web page includes not only the outputting of text information or image information but also the outputting audio information, animation information or the like, which is included in the web page.

20 In order that a user accesses such information, it is necessary to input address information which uniquely represents a server and an HTML document storing that information. This address information is composed of several character strings and is named a
25 URL (Uniform Resource Locator).

However, it is difficult for a user to remember a complicated URL composed of several tens of characters for a long time. Further, in a case where a predetermined page is required to be referred to many times, it is neither convenient nor effective to type this URL every time. Therefore, in order to easily display a web page, a WWW browser is generally provided with a function named a bookmark.

The bookmark function is to register a site which a user is fond of and a page which is frequently accessed, in a browser. The user first registers the URL of a page to be displayed as a bookmark. Then, at the time of accessing, the user displays a list of pages which are registered as bookmarks, and selects a desired page by clicking a mouse. Thus, the user can display his or her desired page without inputting a complicated URL.

Fig. 1 shows an example of a representative bookmark display screen. As shown in Fig. 1, a set of bookmarks 2 can be stored in a folder 1, and the bookmarks 2 are hierarchically managed.

In a folder "Lookup", bookmarks 2 such as "People" and "Yellow Pages" are registered. These bookmarks 2 are list-displayed by clicking the folder "Lookup". The user selects a desired page by double-clicking a

line (an object) indicating the bookmark 2 such as "People" or the like so that he or she can display the desired page on a screen.

However, there arise the following problems about
5 the above-mentioned conventional WWW browser:

Recently, as the functions of a portable personal computer become enhanced and its cost decreases, a lot of presentations and conferences have taken place using such a personal computer. When such
10 presentations or conferences take place, information of a web page is frequently displayed by connecting the personal computer to the Internet.

However, there are a lot of cases where time is greatly restricted when a presentation or a conference
15 is taking place. Therefore, it is neither convenient nor effective to type the above-mentioned URL every time. Therefore, it is thought that the bookmark function is used as a method of quickly displaying a web page. However, this case also requires a lot of
20 effort to display a list of bookmarks and to click the bookmark of a desired page each time, so that it takes a predetermined operation time period to display a page in a browser.

There is a case where a speaker explains pages
25 changing some pages every few minutes according to the

004745.00400

contents of a presentation. In this case, it is necessary to type a URL or select a bookmark whenever changing pages, so that a sufficient explanation cannot be given since the speaker spends a lot of time for operation of the browser system.

Furthermore, on educational scenes, lessons or lectures have been given by referring to the information on web pages with many personal computers connected to the Internet. Repeated at this time are the procedures such that a teacher or professor writes a URL on a blackboard or in a textbook or orally specifies the URL, and each student inputs the URL to the WWW browser of his or her own personal computer so that each student refers to the page specified by the teacher or professor.

However, when each student inputs a URL to his or her own WWW browser, an input may be erroneously made or a considerable amount of time may be taken in some cases, which leads to an obstacle to the smooth progress of a lesson or lecture.

Accordingly, use of a bookmark capability is considered to reduce a student's load of directly inputting a URL, and to ensure the specification of a URL with ease. If it is necessary to use many personal computers at the same time, required bookmark

09477452, 010400

data are preset for each personal computer, and the data after being used is deleted in order to restore the personal computer to its original state. In this case, a considerable amount of time is required to
5 prepare and postprocess the bookmark data, which causes an inconvenience.

Summary of the Invention

An object of the present invention is to provide
10 a slide show system for performing an effective slide show by easily and efficiently displaying the information of one or more web pages, when a presentation, a conference, a lesson or lecture, etc. is given with the use of a browser system which refers
15 to a WWW system.

A slide show system in a first aspect of the present invention comprises a control unit and an interface unit. The control unit obtains the address information defined on an information network
20 according to a predetermined output sequence. The interface unit transmits the obtained address information to a remote side, and instructs the output of the information corresponding to the transmitted address information.

25 A slide show system in a second aspect of the

processing;

Fig. 8 is a flowchart showing processing to be performed by a browser;

Fig. 9 is a flowchart showing first automatic
5 processing;

Fig. 10 is a diagram showing a second operation control parameter file;

Fig. 11 is a flowchart showing second automatic processing;

Fig. 12 is a diagram showing the configuration of a remote slide show system;

Fig. 13 is a diagram showing the configurations of a local side computer and a remote side computer;

Fig. 14 is a diagram showing a third operation control parameter file;

Fig. 15 is a diagram showing an IP address table;

Fig. 16 is a flowchart showing display control processing on a local side;

Fig. 17 is a flowchart showing initialization processing;

Fig. 18 is a flowchart showing manual processing on the local side;

Fig. 19 is a diagram showing a URL input screen;

Fig. 20 is a flowchart showing display control processing on a remote side;

Fig. 21 is a flowchart showing automatic processing on the local side;

Fig. 22 is a flowchart showing registration processing on the local side;

5 Fig. 23 is a flowchart showing registration processing on the remote side;

Fig. 24 is a diagram showing the configuration of an information processing device; and

Fig. 25 is a diagram showing storage media.

10

Description of the Preferred Embodiments:

The preferred embodiments of the present invention will be explained in detail below with reference to the drawings.

15 Fig. 2A is a principle diagram of the slide show system according to the first principle of the present invention. The slide show system shown in Fig. 2A includes a browser unit 11 and a control unit 12.

The browser unit 11 obtains information using the address information defined on an information network, and outputs the thus-obtained information. The control unit 12 informs the address information to the browser unit 11 according to a predetermined output sequence, and instructs the browser unit 11 to output
20 information corresponding to the thus-informed
25

information.

The address information defined on the information network corresponds to, for example, the URL defined on a WWW system. The information obtained using the address information corresponds to, for example, the multi-media information of a web page.

The output sequence of information is predetermined by preparing a correspondence relationship between one or more pieces of the address information and a sequence number. The control unit 12 informs the address information corresponding to the current sequence number to the browser unit 11, according to this output sequence. Thus, the browser unit 11 obtains information using the thus-informed address information, and can output the thus-obtained information.

When the current sequence number is updated, new address information is informed from the control unit 12 to the browser unit 11, and new information is outputted. By repeating these operations, information of web pages to be outputted is sequentially updated so that a slide show can be performed by using the web pages.

According to this slide show system, the control unit 12 informs the address information to the browser

unit 11 according to the output sequence so that a user need not type a URL nor select a bookmark whenever pages are switched. Therefore, the user can concentrate on the explanation of the displayed information.

For example, the browser unit 11 shown in Fig. 2A corresponds to a WWW browser 33, a display device 24, and a speaker 25 shown in Fig. 2B, which will be described later. The control unit 12 shown in Fig. 2A corresponds to a slide show processing unit 31 shown in Fig. 2B.

The slide show system according to the second principle of the present invention comprises a control unit and an interface unit. The control unit obtains the address information defined on an information network according to a predetermined output sequence. The interface unit transmits the obtained address information to a remote side, and instructs the output of the information corresponding to the transmitted address information.

With such a slide show system, a slide show can be simultaneously performed while a teacher's personal computer (PC) transmits address information to one or more students' PCs on an educational scene. As a result, each student no longer need to input the

address information, whereby a lesson or lecture smoothly proceeds.

For example, the slide show system according to the second principle of the present invention
5 corresponds to a local side computer 82 which is shown in Fig. 13 and will be described later, the control unit corresponds to a slide show processing unit 31 of the local side computer 82, and the interface unit corresponds to a network interface unit 32 of the
10 local side computer 82.

A slide show system according to the third principle of the present invention comprises a browser unit, an interface unit, and a control unit. The browser unit obtains information by using the address
15 information defined on an information network, and outputs the obtained information. The interface unit receives the address information transmitted from a local side according to a predetermined output sequence. The control unit notifies the browser unit
20 of the received address information, and instructs the output of the information corresponding to the notified address information.

With such a slide show system, a slide show can be simultaneously performed while one or more students'
25 PCs receive address information from a teacher's PC

on an educational scene, etc. As a result, each student no longer need to input the address information, whereby a lesson or lecture smoothly proceeds.

5 For example, the slide show system according to the third aspect of the present invention corresponds to a remote side computer 83 which is shown in Fig. 13 and will be described later. The browser unit corresponds to a WWW browser 33 and a display device 10 24 of the remote side computer 83. The interface unit corresponds to a network interface unit 32 of the remote side computer 83. The control unit corresponds to a slide show processing unit 31 of the remote side computer 83.

15 In the slide show system of the present embodiments, the following four functions are provided for the presentation to be performed using a WWW browser:

20 Function 1: instructing a display sequence of the URLs which are registered in a bookmark list, using a slide operation button (manual mode)

25 Function 2: automatically causing a browser to display a plurality of pages in predetermined sequence and intervals using the URLs registered in a bookmark list (automatic mode)

Function 3: automatically generating background music (BGM) and a narration

Function 4: after downloading a web page to be displayed at a slide show, storing this page as a local file, and executing the above-mentioned Functions 1 and 2 using this local file

By being provided with the manual mode of Function 1, a user can perform a presentation manually switching pages like the performance of a slide show. Further, by being provided with the automatic mode of Function 2, a user can automatically switch pages without performing manual operations. Therefore, a user can concentrate on the explanation of displayed information.

Further, by being provided with Function 3, more effective presentation can be performed, and a narration can act as necessary explanation. Still further, by being provided with Function 4, a browser need not be connected to the Internet at that occasion so that a presentation can refrain from being interrupted by a connection failure.

Fig. 2B is a configuration diagram showing a slide show system of the present embodiment. The slide show system shown in Fig. 2B is composed of a processing device 21, a data storage device 22, an input device

23, a display device 24, and a speaker 25. These devices are connected to each other via a bus 26.

The input device 23 corresponds to a pointing device such as a keyboard, a mouse or the like, or a touch panel and inputs instructions and data transmitted from a user to the programs executed by the processing device 21. The display device 24 corresponds to, for example, a CRT (cathode ray tube) display, and displays a screen of questions made from a program to the user, processing results, a web page, or the like.

The processing device 21 consists of a slide show processing unit 31, a network interface unit 32, and a WWW browser 33, and is connected to the Internet 27 via the network interface unit 32. An arbitrary method such as a dial-up connection to be performed via a public line, an exclusive line connection using an exclusive line or the like is used as a connection method.

Here, the slide show processing unit 31 and the data storage device 22 (parts encircled by a dotted line) of the processing device 21 mainly perform the above-mentioned functions 1 to 4 of the slide show system. The slide show processing unit 31 includes an operation control parameter edition unit 41, a

bookmark registration unit 42, a bookmark display control unit 43, an automatic calling unit 44, a web page display control unit 45, a BGM control unit 46, and a narration control unit 47. The data storage unit 22 stores an operation control parameter file 51, a bookmark data file 52, and a web page data file 53.

The slide show processing unit 31 corresponds to software components described by programs, and expands the function of the WWW browser 33 by being included as a function of the WWW browser 33, or being provided as in-line or plug-in software.

The operation control parameter file 51 stores various kinds of control parameters which are required for the operation of the slide show system. The bookmark data file 52 stores information such as the title of a page registered as a bookmark, the URL or the like. The web page data file 53 stores information of the pages which are downloaded from a WWW server, in order to use this information for the slide show.

The operation control parameter edition unit 41 sets various kinds of control parameters in the operation control parameter file 51, and also has a function of changing these parameters. When a user instructs the registration of a bookmark, the bookmark registration unit 42 stores the information of the

unit 47 outputs a predetermined narration from the speaker 25 according to the instructions of the automatic calling unit 44.

In this slide show system, an image display
5 bookmark system (Japanese patent application No. 9-264478) which can be more easily handled, can be used other than a conventional bookmark system shown in Fig. 1. According to this image display bookmark system, the image of an actual web page is obtained,
10 and data (an image icon) in which the image is made to be an icon, are registered as a bookmark. A user can easily access his or her desired page by clicking a bookmark which is displayed as an image icon.

Fig. 3 shows the display screen of a bookmark page
15 using such an image icon system. This screen is displayed in such a way that a user performs an operation of displaying the edition screen of a bookmark from the WWW browser 33 or that a user performs an operation of easily displaying a bookmark
20 using a pop-up window. This screen includes a folder display region 61 and an image display region 62.

In the folder display region 61, several folders
for storing a plurality of registered bookmarks are displayed, and generally a bookmark belonging to a
25 single category is stored for each folder. In the

image display region 62, a list of image icons 63 corresponding to the respective bookmarks in a folder which is selected by a user is displayed. Each of the image icons 63 is prepared by reducing the image of a web page corresponding to each bookmark.

According to this example, a folder such as "Default" is selected by a user, and five image icons 63 corresponding to the five bookmarks in this folder are displayed. The folder "Default" also includes two folders such as "search" and "personal computer shop" in addition to these five bookmarks.

By selecting these folders in the folder display region 61, a user can display the image icons 63 of bookmarks stored in these folders. By selecting an image icon 63 in the image display region 62, a page, the URL of which is registered in a corresponding bookmark, is automatically accessed to be displayed on a screen.

The slide show processing unit 31 shown in Fig. 2B can select a bookmark instead of a user and using the operation control parameter file 51, the bookmark data file 52, and the web page data file 53 which correspond to a bookmark page, and further can inform the URL of the thus-selected bookmark to the WWW browser 33.

Fig. 4 shows an example of the slide show screen to be displayed by the slide show system shown in Fig. 2B. This screen includes a web page 71, slide operation buttons 72, 73, and 74, and a termination button 75 (END).

A series of display sequence numbers is supplied to bookmarks to be used for the slide show. When a user pushes a reverse transmission button 72 in a manual mode, a page corresponding to a display sequence number which immediately precedes the currently displayed page, is displayed. When a user pushes a next transmission button 74, a page corresponding to a display sequence number which immediately follows the currently displayed page, is displayed. Here, the display sequence number represents a sequence for displaying the results obtained by accessing a WWW server when a plurality of pages are to be displayed. A pushing process of the button on a screen means an operation of clicking the button using a mouse or the like.

The termination button 75 is used when terminating a slide show in the manual mode. The stop button 73 is used for temporarily stopping the switching of pages in an automatic mode.

Here, operation buttons 72, 73, 74, and 75 are

displayed on a screen, and a user clicks these buttons. However, these input operations can be performed according to an arbitrary method instructed from an arbitrary input device. For example, these
5 operation functions can correspond to specific keys on a keyboard.

In the operation control parameter file 51, data such as shown in Fig. 5 are stored. In Fig. 5, AUTO corresponds to a flag indicating whether or not a
10 display is performed in an automatic mode. When AUTO=Yes, an automatic mode is activated. When AUTO=No, a manual mode is activated.

MAXNUM is a parameter indicating the maximum value of a series of display sequence numbers. WAIT(i) is
15 a parameter indicating a display time period of the page corresponding to a display sequence number i (i=1, 2, ..., MAXNUM). This display time period corresponds to a time interval between the display of a current page and that of the next page. Here, these
20 parameters are set as follows: MAXNUM=20, and WAIT(i)=60 (seconds)

BGM(i) corresponds to a flag indicating whether or not BGM is played when a page corresponding to the display sequence number i is displayed. When
25 BGM(i)=Yes, BGM is played. When BGM(i)=No, BGM is not

played. BGM_FILE(i) is a parameter indicating a file name of a file which stores the sound data of BGM to be played when a page corresponding to the display sequence number i is displayed. Here, this parameter
 5 is set to BGM_FILE(i)=song.avi.

NARRATION(i) corresponds to a flag indicating whether or not a narration is played back when a page corresponding to the display sequence number i is displayed. When NARRATION(i)=Yes, a narration is played back. When NARRATION(i)=No, a narration is not played back. NARRATION__FILE(i) is a parameter indicating the file name of a file which stores the sound data of a narration to be played back when a page corresponding to the display sequence number i
 10 is displayed. Here, this parameter is set to NARRATION FILE(i)=nal.avi.

As WAIT(i), BGM(i), BGM FILE(i), NARRATION(i), and NARRATION_FILE(i), different data can be set for each display sequence number i. The files of BGM and a
 20 narration are stored in, for example, the data storage device 22 shown in Fig. 2B.

Further, for example, data as shown in Fig. 6 are stored in the bookmark data file 52. In Fig. 6, each set of bookmark data is composed of items such as
 25 "title", "URL", "image file name", "comment",

current display sequence number can be obtained by referring to the bookmark data file 52.

Next, display operations performed by the slide show system shown in Fig. 2B will be explained with reference to Fig. 7 to Fig. 11.

Fig. 7 is a flowchart showing the display control processing performed by the slide show processing unit 31. First, the automatic calling unit 44 reads the operation control parameter file 51 from the data storage device 22 (step S1), and checks the value of a flag AUTO (step S2). When AUTO=Yes, an automatic mode is activated, and automatic processing is performed (step S3). The details of this automatic processing will be explained later.

When AUTO=No, a manual mode is activated, and 0 is set to the control variable i indicating a display sequence number (step S4). Then, it is determined which button shown in Fig. 4 a user has pushed (step S5). When the user pushed the reverse transmission button 72, -1 is set to the variable Index indicating a difference of the display sequence number (step S6). When the user pushed the next transmission button 74, 1 is set to the variable Index (step S7). A value obtained adding the Index to the display sequence number is re-set as i, and the value of i is checked

(step S9).

When $i \leq 0$, no display sequence numbers are present. Accordingly, it is set that $i=0$ (step S10), and processes in and after step S5 are repeated. When
5 $i > \text{MAXNUM}$, no display sequence numbers corresponding to this value are present. Accordingly, it is set that $i = \text{MAXNUM}$ (step S11), and processes in and after step S5 are repeated.

In the case of $0 < i \leq \text{MAXNUM}$, the value of a flag
10 $\text{BGM}(i)$ corresponding to the regeneration number i is checked (step S12). When $\text{BGM}(i) = \text{Yes}$, the BGM control unit 46 is activated, and the file name which is set in a $\text{BGM_FILE}(i)$ is supplied to the unit 46.

The BGM control unit 46 reads a BGM file
15 corresponding to the thus-received file name (step S13), plays the sound data (step S14), and returns the control to the automatic calling unit 44. Then, the automatic calling unit 44 repeats processes in and after step S15. When $\text{BGM}(i) = \text{No}$, processes in after
20 step S15 are performed without activating the BGM control unit 46.

In step S15, the automatic calling unit 44 checks the value of a flag $\text{NARRATION}(i)$ corresponding to the display sequence number i . When $\text{NARRATION}(i) = \text{Yes}$, the
25 narration control unit 47 is activated, and the file

name which is set in a NARRATION_FILE(i) is supplied to the unit 47.

The narration control unit 47 reads a narration file corresponding to the thus-received file name (step S16), played back the sound data (step S17), and returns the control to the automatic calling unit 44. Then, the automatic calling unit 44 repeats processes in and after step S18. When NARRATION(i)=No, processes in after step S18 are performed without activating the narration control unit 47.

In step S18, the automatic calling unit 44 activates the web page display control unit 45, and instructs this unit 45 to display a web page corresponding to the display sequence number i. The web page display control unit 45 reads the URL of a bookmark of the display sequence number i from the bookmark data file 52 (step S18), informs this URL to the WWW browser 33 (step S19), and returns the control to the automatic calling unit 44.

Then, the automatic calling unit 44 repeats processes in and after step S5. When a user pushes the termination button 75, processing in a manual mode is terminated.

In step S19 shown in Fig. 7, the WWW browser 33 to which a URL is informed performs display processing

performed between applications without involving a user.

In step S3 shown in Fig. 7, the automatic calling unit 44 performs automatic processing as shown in Fig. 9. First, the automatic calling unit 44 sets a control variable *i* indicating a display sequence number to 0, and sets a variable Index indicating a difference of the display sequence number to 1 (step S31). Next, a value obtained by adding Index to the display sequence number *i* is re-set as *i* (step S32), and the processes in and after S33 are performed.

Here, the processes to be performed in steps S33 to S40 are the same as those performed in steps S12 to S19 shown in Fig. 7. The processing to be performed by the WWW browser 33 to which a URL is informed in step S40 is the same as that shown in Fig. 8.

Next, the automatic calling unit 44 checks a value of the display sequence number *i* (step S41). When $i < \text{MAXNUM}$, the automatic calling unit 44 waits for a time period which is set in $\text{WAIT}(i)$ (step S42), and repeats the processes in and after step S32. When *i* reaches MAXNUM, no display sequence numbers greater than *i* are present, and accordingly the automatic processing is terminated.

When a user pushes the stop button 73 while the

automatic processing is being operated, which is not specifically shown in Fig. 9, the automatic calling unit 44 can temporarily stop the display operation of the next page without regard to a time period which is set in the WAIT(i). In this case, the next transmission button 74, for example, is used for re-starting the display operations. When a user pushes the termination button 75, the automatic calling unit 44 can terminate the automatic processing. Thus, according to the display control processing in an automatic mode, a display sequence number is automatically incremented without a user pushing the operation buttons 72 and 74 so that a slide show is performed. Further, different BGM and different narrations can be played back for each web page to be displayed so that various kinds of slide shows can be performed.

In the above-mentioned embodiments, a different display interval, a different BGM file, and a different narration file are used for each display sequence number. When automatic processings are to be more easily performed, the same display interval, the same BGM file, and the same narration file can be used.

Fig. 10 shows the data of the operation control

parameter file 51 to be used for this automatic processing. In Fig. 10, the flag AUTO and the parameter MAXNUM is the same as the operation control parameter file 51 shown in Fig. 5.

5 A parameter WAIT indicates the display time period of a page which is common to all the display sequence numbers in an automatic mode. A flag BGM indicates whether or not BGM which is common to all the display sequence numbers is played. A parameter BGM_FILE
10 indicates the file name of a file which stores sound data of the BGM. A flag NARRATION indicates whether or not a narration which is common to all the display sequence numbers is played back. A parameter NARRATION
15 FILE indicates the file name of a file which stores sound data of the narration.

When the operation control parameter file 51 shown in Fig. 10 is used, the automatic calling unit 44 performs automatic processing as shown in Fig. 11, in step S3 of Fig. 7. First, the automatic calling unit
20 44 sets a control variable i to 0 which indicates a display sequence number, sets a variable Index to 1 which indicates a difference of the display sequence number (step S51), and checks a value of the flag BGM (step S52). If BGM=Yes, the BGM control unit 46 is
25 activated, and a file name which is set in BGM_FILE

is supplied to the BGM control unit 46.

The BGM control unit 46 reads a BGM file corresponding to the thus-received file name (step S53), plays the sound data (step S54), and returns the control to the automatic calling unit 44. Then, the automatic calling unit 44 performs the processes in and after step S55. When BGM=No, processes in and after step S55 are performed without activating the BGM control unit 46.

In step S55, the automatic calling unit 44 checks the value of a flag NARRATION. When NARRATION=Yes, the narration control unit 47 is activated, and a file name which is set in the NARRATION_FILE is supplied to the narration control unit 47.

The narration control unit 47 reads a narration file corresponding to the thus-received file name (step S56), plays back the sound data (step S57), and returns the control to the automatic calling unit 44. Then, the automatic calling unit 44 performs the processes in and after step S58. When NARRATION=No, processes in after step S58 are performed without activating the narration control unit 47.

In step S58, the automatic calling unit 44 re-sets a value which is obtained by adding the Index to the display sequence number i, as i, and performs

processes in and after step S59. Here, the processes to be performed in steps S59, S60, and S61 are the same as those performed in steps S39, S40, and S41 shown in Fig. 9. A processing to be performed by the WWW browser 33 to which the URL is informed in step S60 is the same as that shown in Fig. 8.

When $i < \text{MAXNUM}$ in step S61, the automatic calling unit 44 waits for a time period which is set in WAIT (step S62), and repeats the processes in and after step S58. In step S61, when i reaches MAXNUM, no sequence numbers greater than i are present, and accordingly the automatic processing is terminated.

According to this display control processing, the BGM and the narration are played back without being switched while the slide show is being performed, and only information of web pages is switched. Therefore, it is not necessary to provide a BGM file and a narration file for each web page to be displayed.

If many PCs are made to perform a slide show at the same time on an educational scene, etc., the mechanism for remotely notifying the WWW browsers of respective PCs of a URL is required. The remote slide show system having such a mechanism provides the following three functions for the simultaneous reference of a specified page with the WWW browsers.

Function 5: arranging a window for inputting a URL to a local side computer, notifying one or a plurality of remote side computers of the URL specified in the window, and making browsers display the corresponding page.

Function 6: notifying one or a plurality of remote side computers of a selected URL if a bookmark desired to be referred to is selected from the bookmarks registered to a local side computer, and making the browsers display the corresponding page.

Function 7: notifying one or a plurality of remote side computers of a URL specified among the URLs registered to the bookmarks of a local side computer, and registering the notified URL as a bookmark to the remote side computers.

For example, the local side computer corresponds to a teacher's PC, and the remote side computer corresponds to a student's PC. With the functions 5 and 6, a teacher issues an instruction to students' PCs from his or her own PC, and allows all of the students to simultaneously and surely open a web page with ease.

Additionally, with the function 7, bookmark data can be easily delivered from a local to a remote side. Accordingly, a teacher can reduce the load of setting

the bookmark data in each computer with a medium such as a floppy disk, etc.

Furthermore, this remote slide show system provides the following three functions for a simultaneously performed slide show.

Function 8: instructing the display sequence of URLs registered as bookmarks with a slide operation button of a local side computer, notifying one or a plurality of remote side computers of the URLs in the instructed sequence, and making the browsers display the corresponding pages (manual mode).

Function 9: automatically notifying one or a plurality of remote side computers of a plurality of URLs in a predetermined sequence at predetermined intervals by using the URLs registered as the bookmarks to a local side computer, and making the browsers automatically display the corresponding pages (automatic mode).

Function 10: downloading web pages to be targeted as a slide show into one or a plurality of remote side computers, making the computers store the downloaded pages as local files, and making the computers execute the above described functions 5, 6, 8, and 9 by using the local files.

With the manual mode of the function 8, a teacher

can give a lesson while manually switching the pages displayed by one or more remote side computers.

Additionally, with the automatic mode of the function 9, pages can be automatically switched without any manual operations. Accordingly, it becomes possible to make a remote side computer easily and surely display necessary pages, and beside, it becomes unnecessary to prepare bookmark data on the remote side computer.

Furthermore, with the function 10, a browser no longer need to make a connection to the Internet on the spot, thereby preventing a lesson or lecture from being suspended due to an unsuccessful connection.

Fig. 12 is a diagram showing the configuration of such a remote slide show system. The remote slide show system shown in this figure comprises the Internet 27, WWW servers 81, a local side computer 82, one or more remote side computers 83, a LAN (Local Area Network) 84, and an Internet connecting device 85.

The local side computer 82 and the remote side computer 83 are interconnected by the LAN 84, and access the WWW servers 81 on the Internet 27 via the Internet connecting device 85. For example, a router is used as the Internet connecting device.

Each of the computers stores the above described

operation control parameter file 51, bookmark data file 52, and web page data file 53, and displays the web page 71 and the bookmark menu 76. Additionally, each of the computers stores an IP (Internet Protocol) address table 54 storing IP addresses, and controls the transmission/reception of page display notification and bookmark data registration notification while referring to the contents of the IP address table 54.

Fig. 13 is a diagram showing the configurations of the local side computer 82 and the remote side computer 83, which are shown in Fig. 12. In a similar manner as in the system shown in Fig. 2B, each of the computers comprises the processing device 21, the data storage device 22, the input device 23, and the display device 24, which are interconnected by the bus 26.

The processing device 21 comprises the above described slide show processing unit 31, network interface unit 32, and WWW browser 33. Here, the slide show processing unit 31 and the data storage device 22 within the processing device 21 (portions enclosed by broken lines) mainly execute the above described functions 5 through 10 of the remote slide show system.

- The slide show processing unit 31 comprises an IP address table edition unit 48 in addition to the above described operation control parameter edition unit 41, bookmark registration unit 42, bookmark display control unit 43, automatic calling unit 44, and web page display control unit 45. The data storage device 22 stores the operation control parameter file 51, the bookmark data file 52, the web page data file 53, and the IP address table 54.
- The IP address table edition unit 48 has a capability for setting the IP address of a communication destination computer and respective flag types in the IP address table 54, and for changing them.
- The slide show processing unit 31 on the local side can select a bookmark instead of a teacher by using the operation control parameter file 51, the bookmark data file 52, the web page data file 53, and the IP address table 54, and can notify the WWW browser 33 on the remote side of the URL of the selected bookmark. The operation buttons shown in Fig. 4 are displayed on the screen of the display device 24 on the local side. These buttons are operated by a teacher.
- In the operation control parameter file 51, for

example, data shown in Fig. 14 are stored. In Fig. 14, S_PUSH corresponds to a flag indicating whether or not (Yes or No) a local side can issue a display instruction to a remote side, and S_ACCEPT corresponds to a flag indicating whether or not (Yes or NO) the remote side accepts the display instruction issued from the local side.

Additionally, B_PUSH corresponds to a flag indicating whether or not (Yes or No) the local side can issue a bookmark data registration instruction to the remote side. B_ACCEPT corresponds to a flag indicating whether or not (Yes or No) the remote side accepts the bookmark data registration instruction issued from the local side. AUTO, MAXNUM, and WAIT(i) are similar to those shown in Fig. 5.

In the bookmark data file 52, for example, the data shown in Fig. 6 are stored. Here, the display sequence number shown in Fig. 6 corresponds to the URL notification sequence notified from the local to the remote side in the automatic mode.

Furthermore, in the IP address table 54, for example, data shown in Fig. 15 are stored. In this figure, an IP address is address information of each computer in a system. For the local side computer 82 which issues a processing instruction, the IP address

of a student's machine represents the IP address of a processing target. For the remote side computer 83 which receives the processing instruction, the IP address of a teacher's machine represents the IP address of an instruction issuing source.

Still further, S_FLAG_S corresponds to a flag indicating whether or not (ON or OFF) a corresponding computer performs page display notification, while S_FLAG_R corresponds to a flag indicating whether or not (ON or OFF) a corresponding computer accepts the page display notification.

B_FLAG_S corresponds to a flag indicating whether or not (ON or OFF) a corresponding computer performs bookmark data registration notification, while B_FLAG_R corresponds to a flag indicating whether or not (ON or OFF) a corresponding computer accepts the bookmark data registration notification. A comment is a comment statement for a corresponding computer, and is added to facilitate the identification of an IP address.

Here, for the IP address of the local side computer 82 being a teacher's machine, S_FLAG_S=OFF, S_FLAG_R=ON, B_FLAG_S=OFF, and B_FLAG_R=ON are set. For the IP address of the remote side computer 83 being a student's machine, S_FLAG_S=ON, S_FLAG_R=OFF,

B_FLAG_S=ON, and B_FLAG_R=OFF are set.

Fundamentally, the same information is registered to the IP address table 54 of each computer. However, only the IP address of a required communication destination may be selectively registered.

Next, the display and the registration operations performed by the remote slide show system shown in Fig. 13 are explained by referring to Figs. 16 through 23.

Fig. 16 is a flowchart showing the display control processing performed by the slide show processing unit 31 on the local side. The slide show processing unit 31 performs initialization processing shown in Fig. 17 (step S71). Here, the automatic calling unit 44 reads the operation control parameter file 51 from the data storage device 22 (step S81), reads the IP address table 54 (step S82), and reads the bookmark data file 52 (step S83).

Next, the automatic calling unit 44 examines the value of the flag AUTO in the operation control parameter file 51 (step S72). If AUTO=No, the automatic calling unit 44 activates a manual mode, performs manual processing (step S73), and terminates the processing. If AUTO=Yes, the automatic calling unit 44 activates an automatic mode, performs

automatic processing (step S74), and terminates the processing.

Fig. 18 is a flowchart showing the manual processing performed in step S73 of Fig. 16. In the manual processing, the automatic calling unit 44 examines the value of the flag S_PUSH in the operation control parameter file 51 (step S91). If S_PUSH=No, the automatic calling unit 44 terminates the processing.

If S_PUSH=Yes, the automatic calling unit 44 determines a URL input method used by a teacher (step S92). If a URL is selected from the bookmark menu 76 shown in Fig. 12 (step S93), the automatic calling unit 44 obtains the URL of the selected bookmark (step S95). If the URL is directly input (step S94), the automatic calling unit 44 obtains the input URL (step S95). In step S94, for example, the input window shown in Fig. 19 is displayed. Then, a teacher inputs the URL to a box 91 and presses a button 92, so that the input URL is obtained.

Next, the automatic calling unit 44 extracts the data of one line from the IP address table 54 (step S96), and examines whether or not the extracted data indicates the end of the IP address table 54 (step S97). If the extracted data does not indicate the end,

the automatic calling unit 44 examines the value of the flag S_FLAG_S included in that data (step S98).

If S_FLAG_S=ON, the automatic calling unit 44 instructs the network interface unit 32 to notify the corresponding IP address of the obtained URL (step S99). Upon receipt of this instruction, the network interface unit 32 notifies the IP address of the URL. Then, the automatic calling unit 44 repeats the processes in and after step S96.

If S_FLAG_S=OFF in step S98, the automatic calling unit 44 repeats the processes in and after step S96 without notifying the URL. If the extracted data indicates the end of the IP address table 54 in step S97, the automatic calling unit 44 terminates the processing.

For example, in the IP address table shown in Fig. 15, the IP address in the first line corresponds to the local side computer 82, and S_FLAG_S=OFF. Accordingly, the notification of the URL is skipped, and the data in the second line is extracted. The IP address in the second line corresponds to the remote side computer 83, and S_FLAG_S=ON. Accordingly, the URL is notified to this IP address. Similar processing is performed also for the data in and after the third line.

When the URL of a bookmark is selected in step S93, the operation buttons shown in Fig. 4 may be used. The processes for selecting and obtaining a URL in this case are similar to those performed in steps S4 through S11 and S18 shown in Fig. 7.

Fig. 20 is a flowchart showing the display control processing performed by the slide show processing unit 31 on the remote side. First of all, the web page display control unit 45 performs the initialization processing shown in Fig. 17 (step S101), and examines the value of the flag S_ACCEPT in the operation control parameter file 51 (step S102). If S_ACCEPT=No, the web page display control unit 45 terminates the processing.

If S_ACCEPT=Yes, the web page display control unit 45 determines whether or not the network interface unit 32 receives a URL from the local side computer 82 (step S103). If the network interface unit 32 does not receive a URL, the web page display control unit 45 repeats the determination. If the network interface unit 32 receives a URL, the web page display control unit 45 identifies the IP address of the local side computer 82 (step S104). Then, the web page display control unit 45 extracts the flag S_FLAG_R corresponding to that IP address from the IP address

table 54, and examines its value (step S105).

If S_FLAG_R=OFF, the web page display control unit 45 repeats the processes in and after step S103. If S_FLAG_R=ON, the web page display control unit 45
5 notifies the WWW browser 33 of the received URL (step S106), and repeats the processes in and after step S103. The processing of the WWW browser 33 is similar to that shown in Fig. 8.

For example, in the IP address table shown in Fig.
10 15, S_FLAG_R=ON for the IP address of the local side computer 82 (teacher's machine). Accordingly, the URLs received from the local side are sequentially notified to the WWW browser 33, and the pages corresponding to the URLs are displayed.

15 Fig. 21 is a flowchart showing the automatic processing performed in step S74 of Fig. 16. In the automatic processing, the automatic calling unit 44 examines the value of the flag S_PUSH in the operation control parameter file 51 (step S111). If S_PUSH=No,
20 the automatic calling unit 44 terminates the processing.

If S_PUSH=Yes, the automatic calling unit 44 assigns "0" to a control variable "i" representing a display sequence number and "1" to a variable "Index" representing a difference of the display sequence
25

number (step S112). Next, the automatic calling unit 44 resets as "i" the value obtained by adding "Index" to the display sequence number "i" (step S113), and extracts the URL of the display sequence number "i" from the bookmark data file 52 (step S114).

The processes performed in steps S115 through S118 are similar to those performed in steps S96 through S99 of Fig. 18. The processing performed by the slide show processing unit 31 on the remote side, to which a URL is notified in step S118, is similar to that shown in Fig. 20.

If the extracted data indicates the end of the IP address table 54 in step S116, the value of the display sequence number "i" is examined (step S119). If $i < \text{MAXNUM}$, the processes in and after step S113 are repeated after the time set in "WAIT(i)" elapses (step S120). When "i" reaches MAXNUM, no greater display sequence numbers exist. The automatic processing is therefore be terminated.

Fig. 22 is a flowchart showing the registration processing performed by the slide show processing unit 31 on the local side. First of all, the automatic calling unit 44 performs the initialization processing shown in Fig. 17 (step S131), and examines the value of the flag B_PUSH in the operation control parameter

file 51 (step S132). If B_PUSH=No, the automatic calling unit 44 terminates the processing.

If B_PUSH=Yes, the automatic calling unit 44 obtains the bookmark data selected by a teacher from the bookmark data file 52 (step S133). Next, the automatic calling unit 44 extracts the text data of one line from the IP address table 54 (step S134), and determines whether or not the extracted data indicates the end of the IP address table 54 (step S135). If the extracted data does not indicate the end of the IP address table 54, the automatic calling unit 44 examines the value of the flag B_FLAG_S included in that data (step S136).

If B_FLAG_S=ON, the automatic calling unit 44 instructs the network interface unit 32 to notify the corresponding IP address of the obtained bookmark data (step S137). Upon receipt of the bookmark data, the network interface unit 32 notifies the IP address of the bookmark data as registration data. Then, the automatic calling unit 44 repeats the processes in and after step S134.

If B_FLAG_S=OFF in step S136, the automatic calling unit 44 repeats the processes in and after step S134 without notifying the bookmark data. If the extracted data indicates the end of the IP address

table 54, the automatic calling unit 44 terminates the processing.

For example, in the IP address table shown in Fig. 15, the IP address in the first line corresponds to the local side computer 82, and B_FLAG_S=OFF. Accordingly, the notification of the bookmark data is skipped, and the data in the second line is extracted. The IP address in the second line corresponds to the remote side computer 83, and B_FLAG_S=ON. As a result, the bookmark data is notified to the IP address data. Similar processing is performed also for the data in and after the third line.

Fig. 23 is a flowchart showing the registration processing performed by the slide show processing unit 31 on the remote side. First of all, the bookmark registration unit 42 performs the initialization processing shown in Fig. 17 (step S141), and examines the value of the flag B_ACCEPT in the operation control parameter file 51 (step S142). If B_ACCEPT=No, the bookmark registration unit 42 terminates the processing.

If B_ACCEPT=Yes, the bookmark registration unit 42 determines whether or not the network interface unit 32 receives the bookmark data from the local side computer 82 (step S143). If the bookmark data is not

received, the bookmark registration unit 42 repeats the determination. If the bookmark data is received, the bookmark registration unit 42 identifies the IP address of the local side computer 82 (step S144).
 5 Then, the bookmark registration unit 42 extracts the flag B_FLAG_R corresponding to the IP address from the IP address table 54, and examines its value (step S145).

If B_FLAG_R=OFF, the bookmark registration unit 42
 10 repeats the processes in and after step S143. If B_FLAG_R=ON, the bookmark registration unit 42 registers the received bookmark data to the bookmark data file 52 (step S146) and repeats the processes in and after step S143.

15 For example, in the IP address table shown in Fig. 15, B_FLAG_R=ON for the IP address of the local side computer 82 (teacher's machine). Accordingly, the bookmark data received from the local side is registered to the bookmark data file 52.

20 With such registration processing, specified bookmark data can be registered to the remote side computer 83 based on the instruction from the local side computer 82.

25 Additionally, the remote side computer 83 can download target web pages for a slide show by using

notified bookmark data, and can store the downloaded pages in the web page data file 53 as local files. In this case, the local side computer 82 notifies the remote side computer 83 of the URLs of those local files, and makes the remote side computer 83 perform the slide show.

In the above described remote slide show system shown in Fig. 12, the LAN 84 is used to interconnect the local side computer 82 and the remote side computer 83. However, a similar remote slide show can be implemented also if a different network such as a WAN (Wide Area Network), etc. is used.

As the slide show system shown in Fig. 2B and the computers 82 and 83 shown in Fig. 13, an information processing device (computer) shown in Fig. 24 can be used. The information processing device shown in Fig. 24 comprises a CPU (Central Processing Unit) 101, a memory 102, an input device 103, an output device 104, an external storage device 105, a medium driving device 106, and a network connection device 107, which are interconnected by a bus 108.

The memory 102 includes, for example, a ROM (Read Only Memory), a RAM (Random Access Memory), etc., and stores programs and data used for processing. The CPU 101 performs necessary processing by executing the

programs with the memory 102.

Here, the slide show processing unit 31, the operation control parameter edition unit 41, the bookmark registration unit 42, the bookmark display control unit 43, the automatic calling unit 44, the web page display control unit 45, the BGM control unit 46, the narration control unit 41, the IP address table edition unit 48, etc. correspond to software components described by the programs, and are respectively stored in specific program code segments in the memory 102.

The input device 103 corresponds to the input device 23 shown in Fig. 2B and 13, and is used to input an instruction or information from a user. The output device 104 includes the display device 24 and the speaker 25, which are shown in Fig. 2B and 13, and is used to make an inquiry to a user and to output the information of a web page, BGM, narration, etc.

The external storage device 105 is, for example, a magnetic disk device, an optical disk device, a magneto-optical disk device, etc. A user can store the above described programs and data in the external storage device 105, and can use them by loading into the memory 102 depending on need. The external storage device 105 can be used also as the data storage device

22 shown in Fig. 2B and 13.

The medium driving device 106 drives a portable storage medium 109, and accesses its stored data. As the portable storage medium 109, an arbitrary computer-readable storage medium such as a memory card, a floppy disk, a CD-ROM (Compact Disk-Read Only Memory), an optical disk, a magneto-optical disk, etc. is used. A user can store the above described programs and data onto the portable storage medium 109, and can use them by loading into the memory 102 as occasion demands.

The network connection device 107 is controlled by the network interface unit 32 shown in Fig. 2B and 13, makes a connection to the Internet 27 via an arbitrary network (line) such as the LAN 84, etc., and performs data conversion accompanying a communication. The information processing device can receive the above described programs and data from an external device via the network connection device 107, and can use them by loading into the memory 102 depending on need.

Fig. 25 show computer-readable storage media which can provide programs and data to the information processing device shown in Fig. 24. The programs and data stored in the portable storage medium 109 or in an external database 110 are loaded into the memory

102. The CPU 101 then performs necessary processing by executing the programs with the data.

According to the present invention, information of one or more web pages can be easily and effectively displayed when a presentation or a conference takes place, using a WWW browser which refers to the information of the WWW.

In a manual mode, for example, a slide operation button is provided so that web pages can be sequentially accessed using existing bookmarks. Therefore, a user can smoothly progress a presentation without typing a URL.

Further, in an automatic mode, a plurality of web pages can be automatically displayed according to a predetermined sequence and a display time period. Therefore, a user can concentrate on a presentation without being directly involved in a display operation.

Further, since BGM and a narration can be automatically played back, an effective presentation can be performed according to the predetermined procedures.

What is Claimed is:

1. A slide show system, comprising:

5 a control unit obtaining address information
defined on an information network according to a
predetermined output sequence; and

an interface unit transmitting obtained address
information to a remote side, and for instructing an
output of information corresponding to the transmitted
10 address information.

2. The slide show system according to claim 1,
further comprising

a storing unit storing a correspondence
15 relationship between one or more pieces of address
information and a sequence number representing the
output sequence, wherein

said control unit determines address information
notified to the remote side by referring to the
20 correspondence relationship.

3. A slide show system, comprising:

a browser unit obtaining information by using
address information defined on an information network;
25 an interface unit receiving address information

transmitted from a local side according to a predetermined output sequence; and

a control unit notifying said browser unit of received address information, and for instructing an output of information corresponding to the notified address information.

4. A computer-readable storage medium on which is recorded a program for causing a computer to execute a process, said process comprising:

referring to a correspondence relationship between one or more pieces of address information defined on an information network, and a sequence number representing a predetermined output sequence;

transmitting to a remote side address information corresponding to a current sequence number; and

instructing the remote side to output information corresponding to transmitted address information.

5. A computer-readable storage medium on which is recorded a program for causing a computer to execute a process, said process comprising:

receiving from a local side address information corresponding to a current sequence number, which is obtained from a correspondence relationship between

00477452-010400

one or more pieces of address information defined on
an information network, and a sequence number
representing a predetermined output sequence;

5 notifying a browser of received address
information; and

instructing the browser to output information
corresponding to notified address information.

00477452.030400

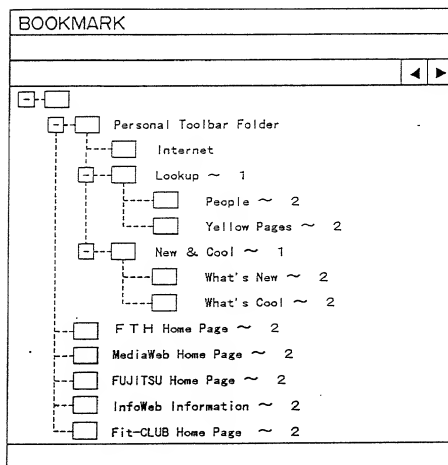


FIG. 1

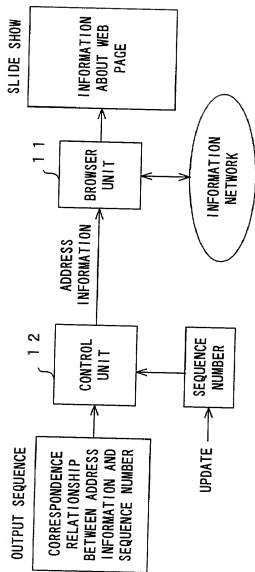


FIG. 2A

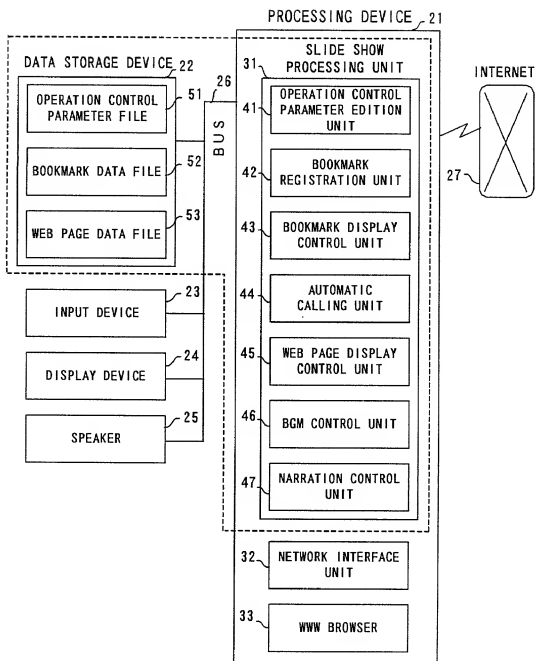


FIG. 2B

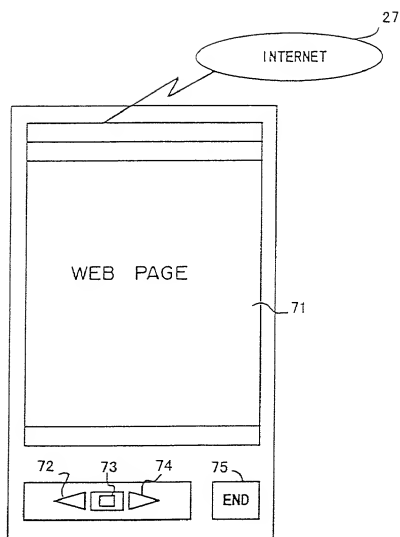


FIG. 4

FLAG NAME=FLAG	MEANING
AUTO=Yes	AUTOMATIC DISPLAY IS PERFORMED? Yes OR No
MAXNUM=20	MAXIMUM VALUE OF DISPLAY SEQUENCE NUMBER
WAIT(i)=60	IN CASE OF AUTOMATIC DISPLAY, INTERVAL BETWEEN DISPLAYS(SECONDS) (i=1..MAXNUM)
BGM(i)=Yes	BCGM IS PLAYED? Yes OR No (i=1..MAXNUM)
BGM_FILE(i)=song.avi	FILE OF BGM (i=1..MAXNUM)
NARRATION(i)=Yes	NARRATION IS PLAYED BACK? Yes OR No (i=1..MAXNUM)
NARRATION_FILE(i)=na1.avi	FILE OF NARRATION (i=1..MAXNUM)

FIG. 5

TITLE	URL	IMAGE FILE NAME	COMMENT	COORDINATE VALUE	DISPLAY SEQUENCE NUMBER
xxx HOME Page	http://www.xxx.co.jp	xxx1.bmp	hogehoge..	10, 10	1
yyy HOME Page	http://www.yyy.co.jp	xxx3.bmp	hogehoge..	40, 10	3
zzz HOME Page	file:///D:/cache/file1.html	xxx4.bmp	hogehoge...	80, 10	5
:	:	:	:	:	:

FIG. 6


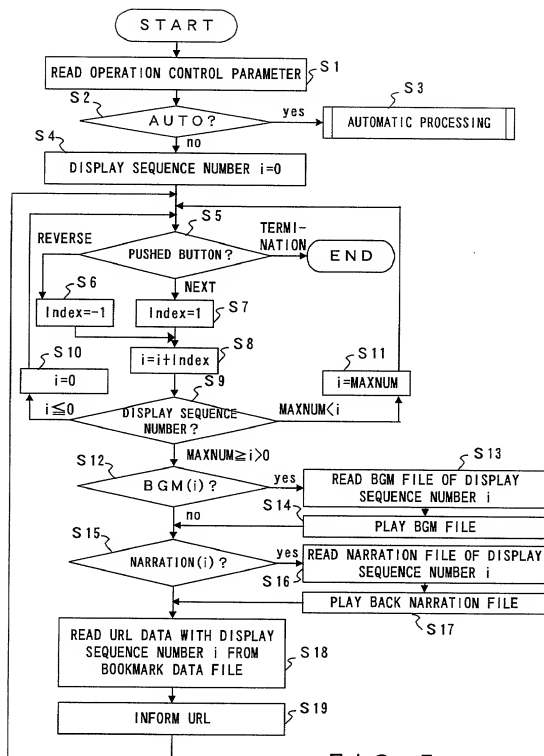


FIG. 7



F I G. 8

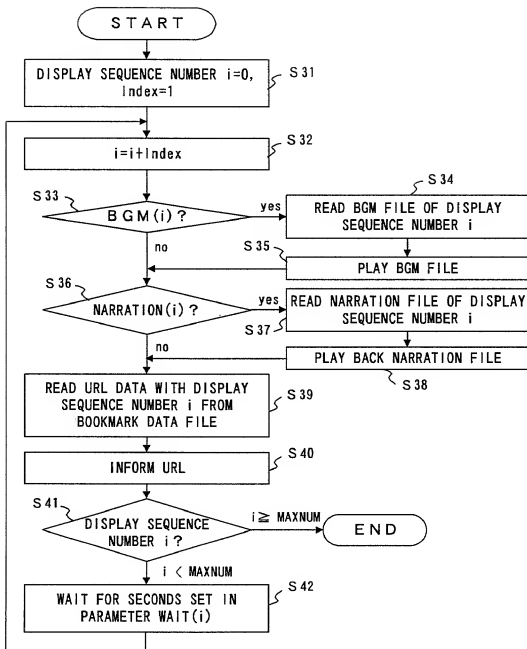


FIG. 9

FLAG NAME=FLAG	MEANING
AUTO=Yes	AUTOMATIC DISPLAY IS PERFORMED? Yes OR No
MAXNUM=20	MAXIMUM VALUE OF DISPLAY SEQUENCE NUMBER
WAIT=60	IN CASE OF AUTOMATIC DISPLAY, INTERVAL BETWEEN DISPLAYS(SECONDS)
BGM=Yes	BGM IS PLAYED? Yes OR No
BGM__FILE=song.avi	FILE OF BGM
NARRATION=Yes	NARRATION IS PLAY BACK? Yes OR No
NARRATION__FILE=nal.avi	FILE OF NARRATION

FIG. 10


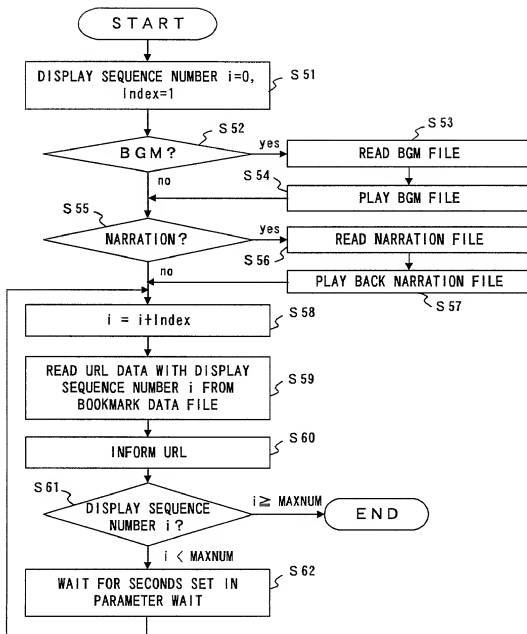


FIG. 11

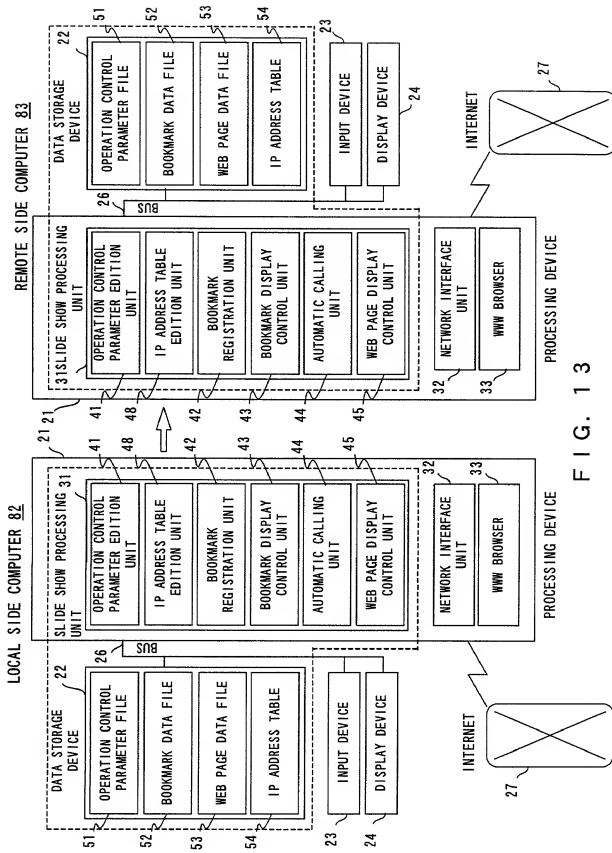

FLAG NAME = FLAG	MEANING
S_PUSH=Yes	WHETHER OR NOT (Yes OR No) LOCAL SIDE CAN ISSUE DISPLAY INSTRUCTION TO REMOTE SIDE
S_ACCEPT=Yes	WHETHER OR NOT (Yes OR No) REMOTE SIDE ACCEPTS DISPLAY INSTRUCTION FROM LOCAL SIDE
B_PUSH=Yes	WHETHER OR NOT (Yes OR No) LOCAL SIDE CAN ISSUE BOOKMARK DATA REGISTRATION INSTRUCTION TO REMOTE SIDE
B_ACCEPT=Yes	WHETHER OR NOT (Yes OR No) REMOTE SIDE ACCEPTS BOOKMARK DATA REGISTRATION INSTRUCTION FROM LOCAL SIDE
AUTO=Yes	WHETHER OR NOT (Yes OR No) TO PERFORM AUTOMATIC DISPLAY
MAXNUM=20	MAXIMUM VALUE OF DISPLAY SEQUENCE NUMBER
WAIT(i)=60	INTERVAL AT DISPLAYS (SECONDS) FOR AUTOMATIC DISPLAY (i=1 ... MAXNUM)

F I G. 1 4

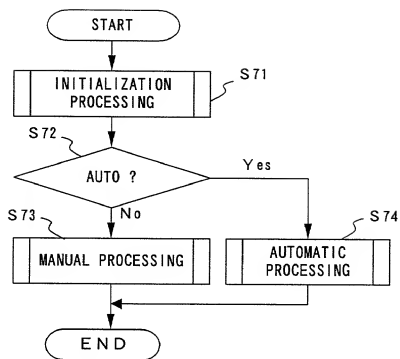


FIG. 16

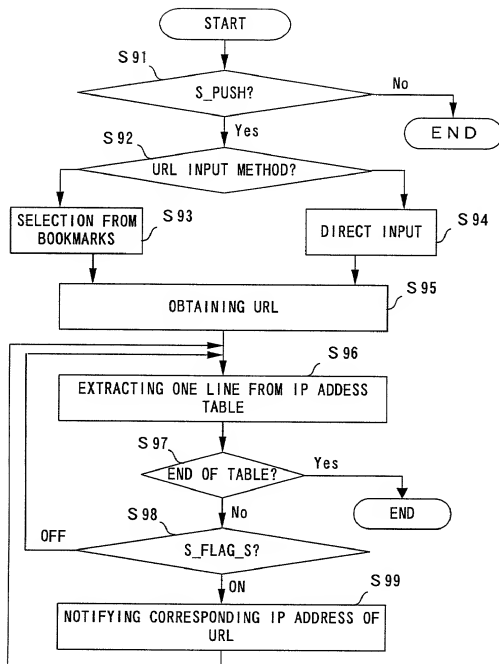


FIG. 18

OPENING URL

http://www.mediaweb.ad.jp/help/ 9 1

Open URL 9 2

FIG. 19

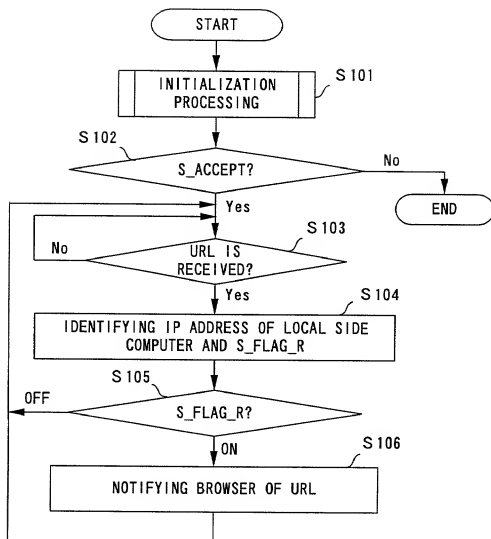


FIG. 20

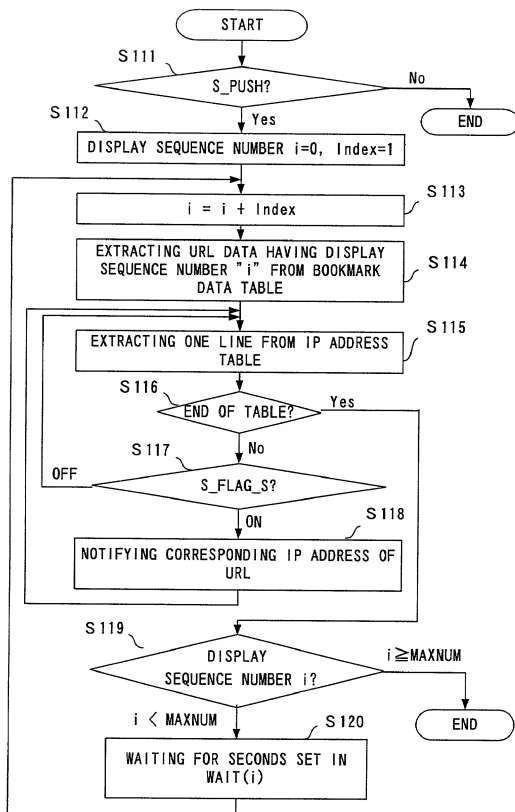


FIG. 21


```

graph TD
    START([START]) --> S131[INITIALIZATION PROCESSING]
    S131 --> S132{B_PUSH?}
    S132 -- No --> END1([END])
    S132 -- Yes --> S133[SELECTING BOOKMARK]
    S133 --> S134[EXTRACTING ONE LINE FROM IP ADDRESS TABLE]
    S134 --> S135{END OF TABLE?}
    S135 -- Yes --> END2([END])
    S135 -- No --> S136{B_FLAG_S?}
    S136 -- OFF --> S134
    S136 -- ON --> S137[NOTIFYING CORRESPONDING IP ADDRESS OF REGISTRATION DATA]
    S137 --> S134

```

F I G. 22

```
graph TD
    START([START]) --> S141[INITIALIZATION PROCESSING]
    S141 --> S142{B_ACCEPT?}
    S142 -- No --> END([END])
    S142 -- Yes --> S143{BOOKMARK DATA IS RECEIVED?}
    S143 -- No --> S142
    S143 -- Yes --> S144[IDENTIFYING IP ADDRESS OF LOCAL SIDE COMPUTER AND B_FLAG_R]
    S144 --> S145{B_FLAG_R?}
    S145 -- OFF --> S142
    S145 -- ON --> S146[REGISTERING BOOKMARK DATA]
    S146 --> S142
```

The flowchart illustrates the initialization process (S141). It begins with a START terminal, leading to the INITIALIZATION PROCESSING block (S141). Following this, a decision is made at S142: "B_ACCEPT?". If the answer is "No", the process terminates at the END terminal. If the answer is "Yes", the process proceeds to S143: "BOOKMARK DATA IS RECEIVED?". If the answer to S143 is "No", the flow loops back to the entry point of S142. If the answer is "Yes", the process moves to S144: "IDENTIFYING IP ADDRESS OF LOCAL SIDE COMPUTER AND B_FLAG_R". This leads to decision S145: "B_FLAG_R?". If the answer is "OFF", the flow loops back to the entry point of S142. If the answer is "ON", the process proceeds to S146: "REGISTERING BOOKMARK DATA", which then loops back to the entry point of S142.

F I G. 23

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下りの氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

REMOTE SLIDE SHOW SYSTEM

USING A BROWSER

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法第37編第1条56項に定義されるとおり、特許資料の右版について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基き下記の、米国外の国の少なくとも一か国を指定している特許協力条約365(a)項に基き国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願した特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

10-213799

(Number)

(番号)

Japan

(Country)

(国名)

11-184852

(Number)

(番号)

Japan

(Country)

(国名)

私、第35編米国法典119条(e)項に基いて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基いて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基き権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外特許出願提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入力された、連邦原則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

09/244,043

(Application No.)

(出願番号)

4th/Feb./1999

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣誓書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基き表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基き、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

29th/July/1998

(Day/Month/Year Filed)

(出願年月日)

30th/June/1999

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

Pending

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続を米特許商標局に対して遂行する弁護士または代理人
として、下記の者を指名いたします。(弁護士、または代理
人の氏名及び登録番号を明記のこと)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,
30,358; William F. Herbert, 31,024; Richard A. Golhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.
Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlese, 35,269; Harlan B. Williams, Jr., 34,756;
George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M.
Scherler, 35,348 (agent)

書類送付先

Sand Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者	Full name of sole or first inventor	Hironori KANNO
発明者の署名 R 付	Inventor's signature	Hironori Kanno
住所	Residence	Miyagi, Japan
国籍	Citizenship	Japan
私書箱	Post Office Address	c/o FUJITSU TOHOKU SYSTEMS ENGINEERING LIMITED, 3-5, Ichibancho 3-chome, Aoba- ku, Sendai-shi, Miyagi 980-8520, Japan
第二共同発明者	Full name of second joint inventor, if any	Yoshiyuki HIRASHIMA
第二共同発明者 日付	Second inventor's signature	Yoshiyuki Hirashima
住所	Residence	Miyagi, Japan
国籍	Citizenship	Japan
私書箱	Post Office Address	c/o FUJITSU TOHOKU SYSTEMS ENGINEERING LIMITED, 3-5, Ichibancho 3-chome, Aoba- ku, Sendai-shi, Miyagi 980-8520, Japan

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Mikio FURUYAMA
第三共同発明者 日付	Third inventor's signature Date Mikio Furuyama December 14, 1999
住 所	Residence Miyagi, Japan
国 籍	Citizenship Japan
私書箱	Post Office Address c/o FUJITSU TOHOKU SYSTEMS ENGINEERING LIMITED, 3-5, Ichibancho 3-chome, Aoba-ku, Sendai-shi, Miyagi 980-8520, Japan
第四共同発明者	Full name of fourth joint inventor, if any
第四共同発明者 日付	Fourth inventor's signature Date
住 所	Residence
国 籍	Citizenship
私書箱	Post Office Address

第五共同発明者	Full name of fifth joint inventor, if any
第五共同発明者 日付	Fifth inventor's signature Date
住 所	Residence
国 籍	Citizenship
私書箱	Post Office Address
第六共同発明者	Full name of sixth joint inventor, if any
第六共同発明者 日付	Sixth inventor's signature Date
住 所	Residence
国 籍	Citizenship
私書箱	Post Office Address

(第七以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for seventh and subsequent joint inventors.)